

# Emergency Pack for LED Light


## 1. DESCRIPTION

Emergency Pack Model'NGF GO /23 is designed for Emergency LED Light with external driver.

## 2. TECHNICAL SPECIFICATION

1. Input Voltage (Dual)	AC220V-240V, 50-60Hz
2. Normal function Indicating LED	Equipped
3. Emergency Function Testing Device	Equipped
4. Emergency Time	3hrs-4hrs
5. Battery Protection Device	Equipped
6. Operating Temp	0 ~ 80 °C
7. Battery	High temp Ni-CD 7.4V 2200mAh
8. Start-up Charging Time	24 hours
9. Power consumption	<5W
10. Trickle charge	250mA
11. Normal discharge current	1.1A
12. Emergency power	3W

## 3. WIRING DIAGRAM

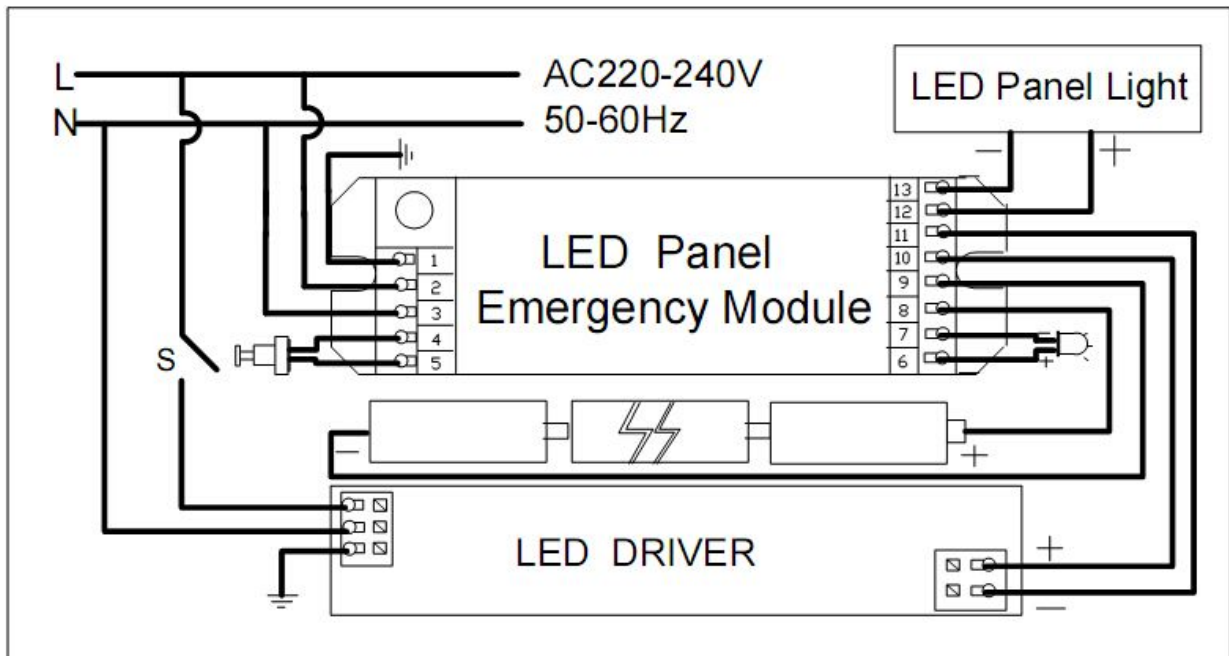



**6.7. In normal use, the battery can work for a 1000 charge/discharge cycles**

**6.8. Inverter warranty is 3 years**

**6.9. If you experience any problems during this period, please contact with supplier.**