



HILINEAR-UP

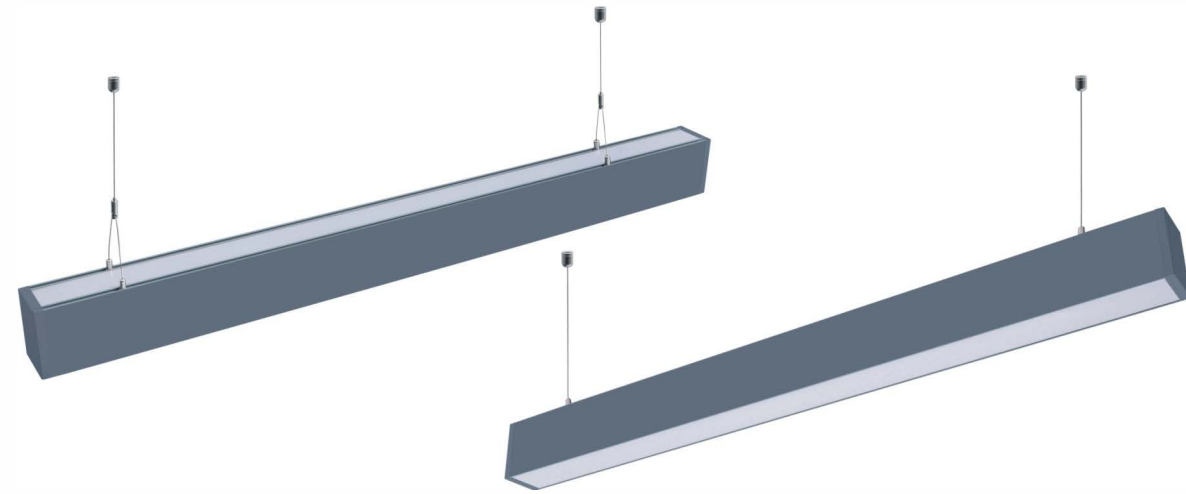

Technical Data


Mode: LH75105
 Housing material: 6063-T5
 Surface treatment: anodizing, powder coating
 Diffuser: PC
 Light source: SMD
 Luminaires efficiency: 100LM/W
 CRI: ≥ 82
 Colour temperature: 3000K/4000K/6000K
 Input voltage: 100-277V/200-240V 50/60Hz
 Driver: High efficiency driver
 Dimming type: 0-10V, DALI dimming, up down light control
 Fixture lifespan: 5 years warranty
 Certificate: CE, RoHS, FCC
 IP: IP20
 Electric grade: I

Standard specifications



Item No.	Power	Flux	L*W*H
75105LH20W06	40W	3850-4050	620 × 75 × 105mm
75105LH60W12	60W	5850-6050	1215 × 75 × 105mm
75105LH75W15	75W	7350-7550	1510 × 75 × 105mm
75105LH90W18	90W	8850-9050	1808 × 75 × 105mm
75105LH120W24	120W	11850-12050	2402 × 75 × 105mm

Adapter

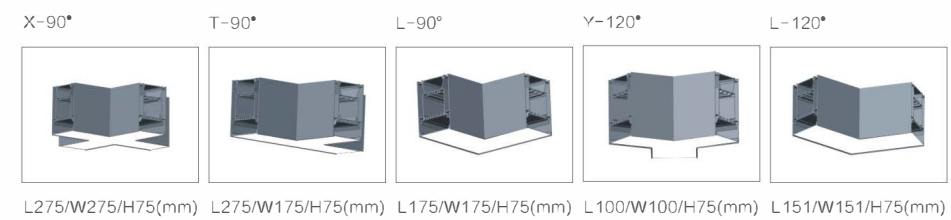

Modeling diagram

